

Typical Applications


The TRFS-304 is an IF variable-gain amplifier core circuit, designed for use in such applications as:

- CDMA2000, AMPS, US PCS High Band, US PCS Low Band, Korean PCS, JTACS, TACS systems
- Dual-mode and multi-band applications
- Voice and data applications

Product Overview

The TRFS-304 is an IF variable-gain amplifier for multi-band wireless communication applications operating at 150MHz and 350MHz. The amplifier has a wide gain range, high linearity, and low power consumption. This core circuitry can be easily integrated with other circuits as well as packaged individually in a leadless chip carrier.

Block Diagram

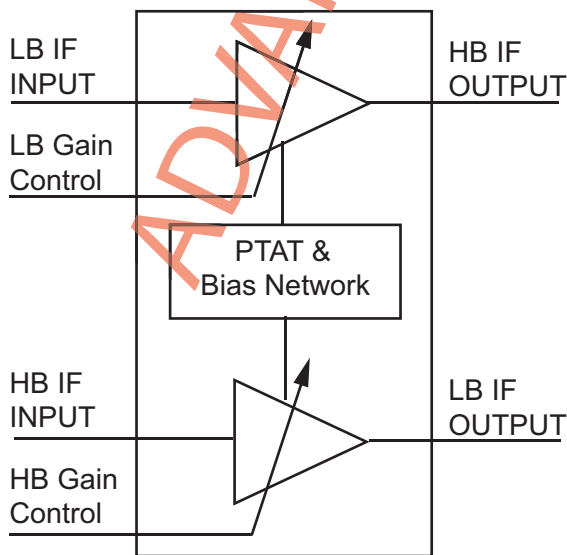

Key Features

- Multi-band IF VGA at 150-200MHz and 350-400MHz
- High linearity with OIP3 of 12dB and low noise of 5.5nV/√Hz @40MHz offset
- Low current consumption

Performance Summary

Item	Unit	Min	Typical	Max	Notes
Supply Voltage	V	2.7	3.0	3.3	
Low Band					
Operating Frequency	MHz	150		200	
Gain Range	dB	-50		0	
Output Referred Noise @40MHz offset	nV/√Hz		5.5		
3 rd Harmonic Output	dB		-60		
OIP3	dBV		13.5		@Pin=-17dBV
Supply Current (Icc)	mA		6		
High Band					
Operating Frequency	MHz	350		400	
Gain Range	dBc	-50		2	
Output Referred Noise @40MHz offset	nV/√Hz		5.5		
3 rd Harmonic Output	dB		-55		
OIP3	dBV		12		@Pin=-17dBV
Supply Current (Icc)	mA		6		

ADVANCE INFORMATION

Contact: sales@tahoerf.com
Tahoe RF Semiconductor, Inc.
12834 Earhart Ave
Auburn, CA 95602
<http://www.tahoerf.com>
(530) 823-9786